


| REV | DATE | DESCRIPTION | DRAWN |
|-----|------|-------------|-------|
| | | | |
| | | | |



Prohibit re-circulating

NOTE:
 1. N MALE
 CENTER PIN GOLD PLATING 3μ THICK OVER NICKEL STRIKE
 BODY NICKEL PLATING 70μ THICK OVER NICKEL STRIKE
 BRASS AND PTFE PER SGS
 FINISH PLATING THICKNESS IN MICRO-INCHES
 COPPER PARTS AUTOMATIC CNC MANUFACTURING
 2. LOW LOSS 400 COAXIAL CABLE/8D
 ATTENUATION : 0.061dB/ft@1575MHz 0.086dB/ft@3000MHz 0.125dB/ft@6000MHz
 CONDUCTOR : COPPER CLAD ALUMINIUM/Ø2.74mm
 INSULATION : GAS-FPE/Ø7.24mm
 TAPE : BONDED ALUMINUM FOIL
 SHIELD : TINNED COPPER WARE/16*6*0.12mm/67% COVERAGE
 JACKET : PE/Ø10.29mm

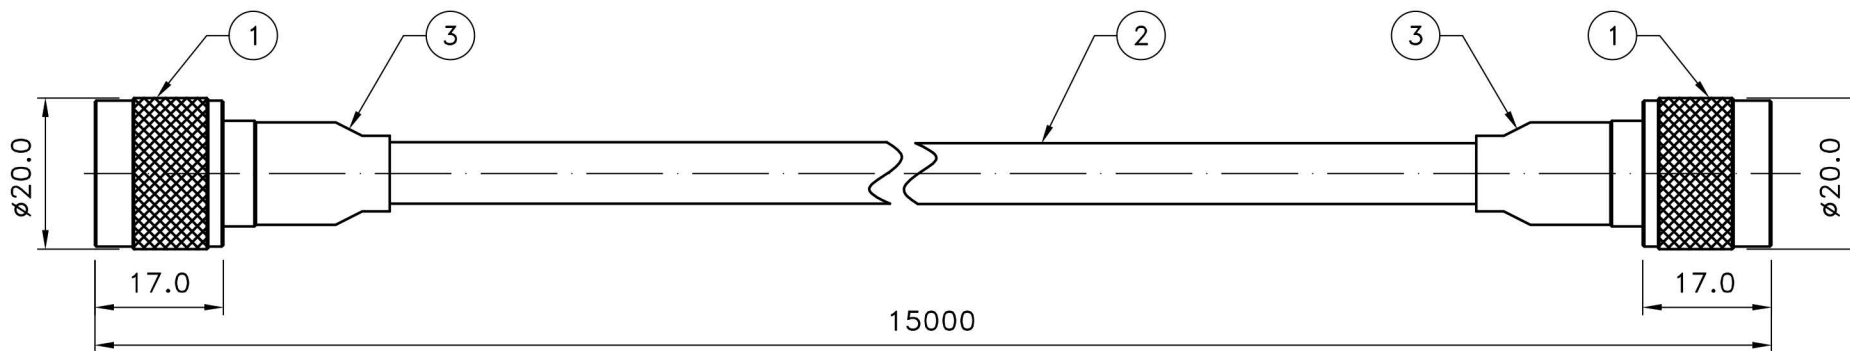

| NO | DESCRIPTION | MATERIAL | FINISH | Q'ty |
|----|---------------------|----------|--------|------|
| 3 | D0087 (SHRINK TUBE) | PE | BLACK | 2 |
| 2 | LLC400 | ASSY | BLACK | 1 |
| 1 | N-1101-5-B4-TGN | BRASS | NICKEL | 2 |

| NOTE | DIMENSION |
|---|--|
| 1. STRIP ALL BURRS. 2. ALL DIMENSIONS ARE AFTER PLATING. 3. DIAMETERS ON COMMON CENTERS. TO BE CONCENTRIC WITHIN 0.1 T.I.R 4. CHAMFER 1ST & LAST THREADS 45° 5. BREAK ALL CONNERS & EDGES CO.15 MAX. | UNLESS OTHERWISE NOTED TOLERANCES $0.X = \pm 0.2$ $0.XX = \pm 0.1$ CABLE LENGTH: $L \geq 10000 = \pm 50$ $1000 \leq L < 10000 = \pm 30$ $L < 1000 = \pm 8$ |

| TITLE | |
|------------------|------------|
| N male to N male | |
| DRAWING NO. | |
| np-np-400-15.0 | |
| APPROVED | DRAWN DATE |
| | 02/21/14 |
| CHECKED | SCALE |
| | 1:1 |
| DRAWN | UNIT |
| ALICE | mm |