


REV	DATE	DESCRIPTION	DRAWN

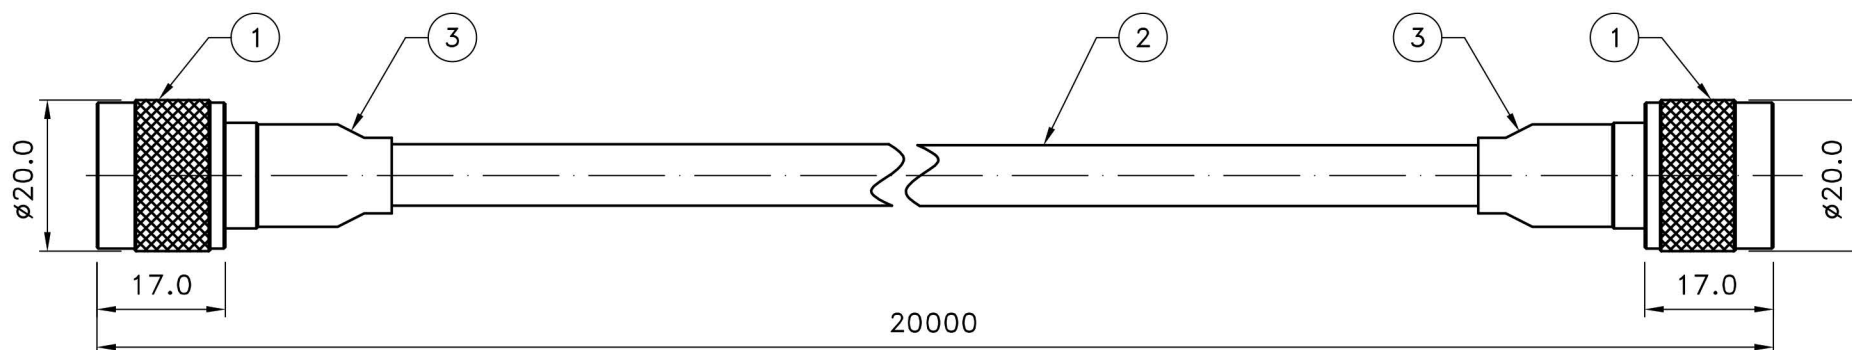

NOTE:
1.N MALE
CENTER PIN GOLD PLATING 3μ THICK OVER NICKEL STRIKE
BODY NICKEL PLATING 70μ THICK OVER NICKEL STRIKE
BRASS AND PTFE PER SGS
FINISH PLATING THICKNESS IN MICRO-INCHES
COPPER PARTS AUTOMATIC CNC MANUFACTURING
2.LOW LOSS 400 COAXIAL CABLE/8D
ATTENUATION : 0.061dB/ft@1575MHz 0.086dB/ft@3000MHz 0.125dB/ft@6000MHz
CONDUCTOR : COPPER CLAD ALUMINIUM/Ø2.74mm
INSULATION : GAS-FPE/Ø7.24mm
TAPE : BONDED ALUMINUM FOIL
SHIELD : TINNED COPPER WARE/16*6*0.12mm/67% COVERAGE
JACKET : PE/Ø10.29mm

3	D0087 (SHRINK TUBE)	PE	BLACK	2
2	LLC400	ASSY	BLACK	1
1	N-1101-5-B4-TGN	BRASS	NICKEL	2
NO	DESCRIPTION	MATERIAL	FINISH	Q'ty

Prohibit re-circulating



NOTE	DIMENSION
1.STRIP ALL BURRS. 2.ALL DIMENSIONS ARE AFTER PLATING. 3.DIAMETERS ON COMMON CENTERS. TO BE CONCENTRIC WITHIN 0.1 T.I.R 4.CHAMFER 1ST & LAST THREADS 45° 5.BREAK ALL CONNERS & EDGES CO.15 MAX.	UNLESS OTHERWISE NOTED TOLERANCES 0.X=±0.2 0.XX=±0.1 CABLE LENGTH: L ≥10000=+ ⁵⁰ ₀ 1000≤L<10000=+ ³⁰ ₋₀ L<1000=+ ⁸ ₋₀

 WIFI-Link™ 台灣威海尼可	
TITLE N male to N male	
DRAWING NO. np-np-400-20.0	
APPROVED	DRAWN DATE 02/21/14
CHECKED	SCALE 1:1
DRAWN ALICE	UNIT mm