


REV	DATE	DESCRIPTION	DRAWN



Prohibit re-circulating

NOTE:
 1.N MALE
 CENTER PIN GOLD PLATING 3μ THICK OVER NICKEL STRIKE
 BODY NICKEL PLATING 70μ THICK OVER NICKEL STRIKE
 BRASS AND PTFE PER SGS
 FINISH PLATING THICKNESS IN MICRO-INCHES
 COPPER PARTS AUTOMATIC CNC MANUFACTURING
 2.LOW LOSS 400 COAXIAL CABLE/8D
 ATTENUATION : 0.061dB/ft@1575MHz 0.086dB/ft@3000MHz 0.125dB/ft@6000MHz
 CONDUCTOR : COPPER CLAD ALUMINIUM/Ø2.74mm
 INSULATION : GAS-FPE/Ø7.24mm
 TAPE : BONDED ALUMINIUM FOIL
 SHIELD : TINNED COPPER WARE/16*6*0.12mm/67% COVERAGE
 JACKET : PE/Ø10.29mm

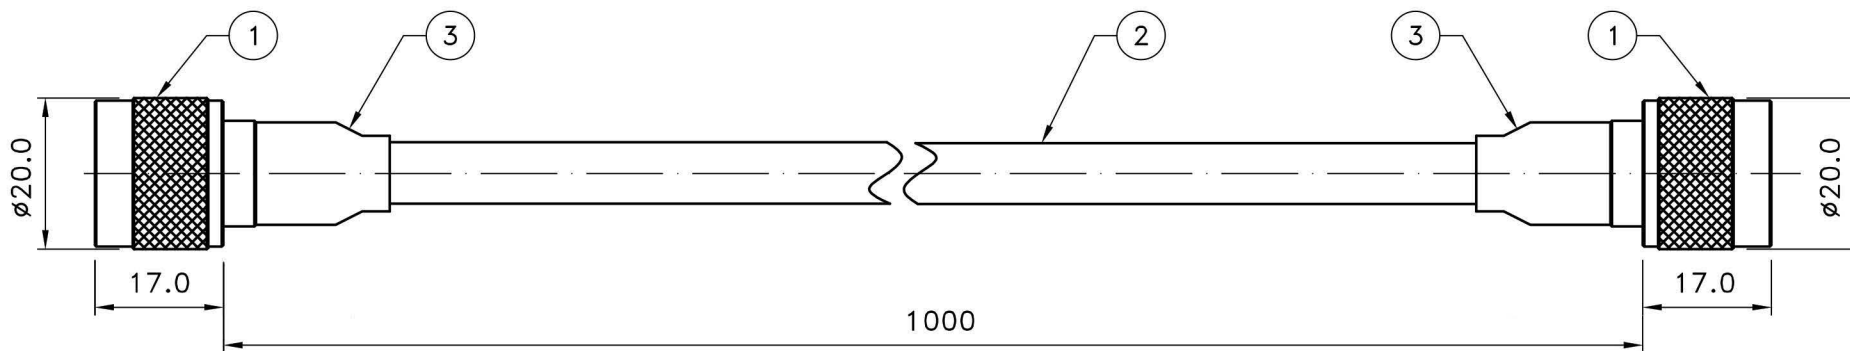

WIFI-Link™ 台灣威海尼可	
TITLE N male to N male	
DRAWING NO. np-np-400-1.0	
APPROVED	DRAWN DATE 02/21/14
CHECKED	SCALE 1:1
DRAWN ALICE	UNIT mm

NOTE	DIMENSION
1. STRIP ALL BURRS. 2. ALL DIMENSIONS ARE AFTER PLATING. 3. DIAMETERS ON COMMON CENTERS. TO BE CONCENTRIC WITHIN 0.1 T.I.R 4. CHAMFER 1ST & LAST THREADS 45° 5. BREAK ALL CONNERS & EDGES CO.15 MAX.	UNLESS OTHERWISE NOTED TOLERANCES $0.X = \pm 0.2$ $0.XX = \pm 0.1$ CABLE LENGTH: $L \geq 10000 = \begin{matrix} +50 \\ -0 \end{matrix}$ $1000 \leq L < 10000 = \begin{matrix} +30 \\ -0 \end{matrix}$ $L < 1000 = \begin{matrix} +8 \\ -0 \end{matrix}$

NO	DESCRIPTION	MATERIAL	FINISH	Q'ty
3	D0087 (SHRINK TUBE)	PE	BLACK	2
2	LLC400	ASSY	BLACK	1
1	N-1101-5-B4-TGN	BRASS	NICKEL	2