


REV	DATE	DESCRIPTION	DRAWN

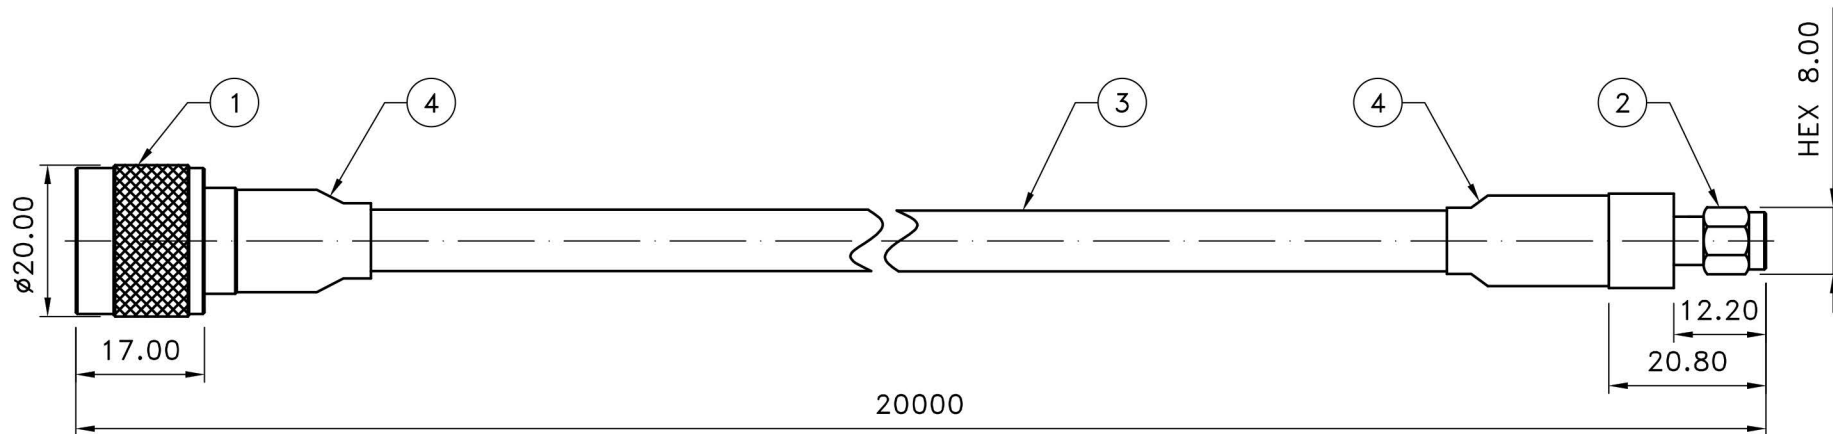

NOTE:
1.N MALE CRIMP
CENTER PIN GOLD PLATING 3μ THICK OVER NICKEL STRIKE
BODY NICKEL PLATING 70μ THICK OVER NICKEL STRIKE
BRASS AND PTFE PER SGS
FINISH PLATING THICKNESS IN MICRO-INCHES
COPPER PARTS AUTOMATIC CNC MANUFACTURING
2.RP SMA MALE CRIMP
CENTER PIN GOLD PLATING 3μ THICK OVER NICKEL STRIKE
BODY NICKEL PLATING 70μ THICK OVER NICKEL STRIKE
BRASS AND PTFE PER SGS
PTFE : TOMBO No.9002
FINISH PLATING THICKNESS IN MICRO-INCHES
COPPER PARTS AUTOMATIC CNC MANUFACTURING
3.LOW LOSS 400 COAXIAL CABLE/8D
ATTENUATION : 0.061dB/ft@1575MHz 0.086dB/ft@3000MHz 0.125dB/ft@6000MHz
CONDUCTOR : COPPER CLAD ALUMINIUM/Ø2.74mm
INSULATION : GAS-FPE/Ø7.24mm
TAPE : BONDED ALUMINUM FOIL
SHIELD : TINNED COPPER WARE/16*6*0.12mm/67% COVERAGE
JACKET : PE/Ø10.29mm

Prohibit re-circulating

RoHS COMPLIANT

WIFI-Link™
台灣威海尼可

NO	DESCRIPTION	MATERIAL	FINISH	Q'ty
4	D0087 (SHRINK TUBE)	PE	BLACK	2
3	LLC400	ASSY	BLACK	1
2	SMA-1001-13-B4-TGN	BRASS	NICKEL	1
1	N-1101-9-B4-TGN	BRASS	NICKEL	1

NOTE	DIMENSION
1. STRIP ALL BURRS. 2. ALL DIMENSIONS ARE AFTER PLATING. 3. DIAMETERS ON COMMON CENTERS. TO BE CONCENTRIC WITHIN 0.1 T.I.R 4. CHAMFER 1ST & LAST THREADS 45° 5. BREAK ALL CONNERS & EDGES CO.15 MAX.	UNLESS OTHERWISE NOTED TOLERANCES 0.X=±0.2 0.XX=±0.1 CABLE LENGTH: L ≥ 10000 = + ⁵⁰ ₋₀ 1000 ≤ L < 10000 = + ³⁰ ₋₀ L < 1000 = + ⁸ ₋₀

TITLE N male to RP SMA male	
DRAWING NO. np-rsmap-400-20.0	
APPROVED	DRAWN DATE 03/01/18
CHECKED	SCALE 1:1
DRAWN ALICE	UNIT mm