


REV	DATE	DESCRIPTION	DRAWN

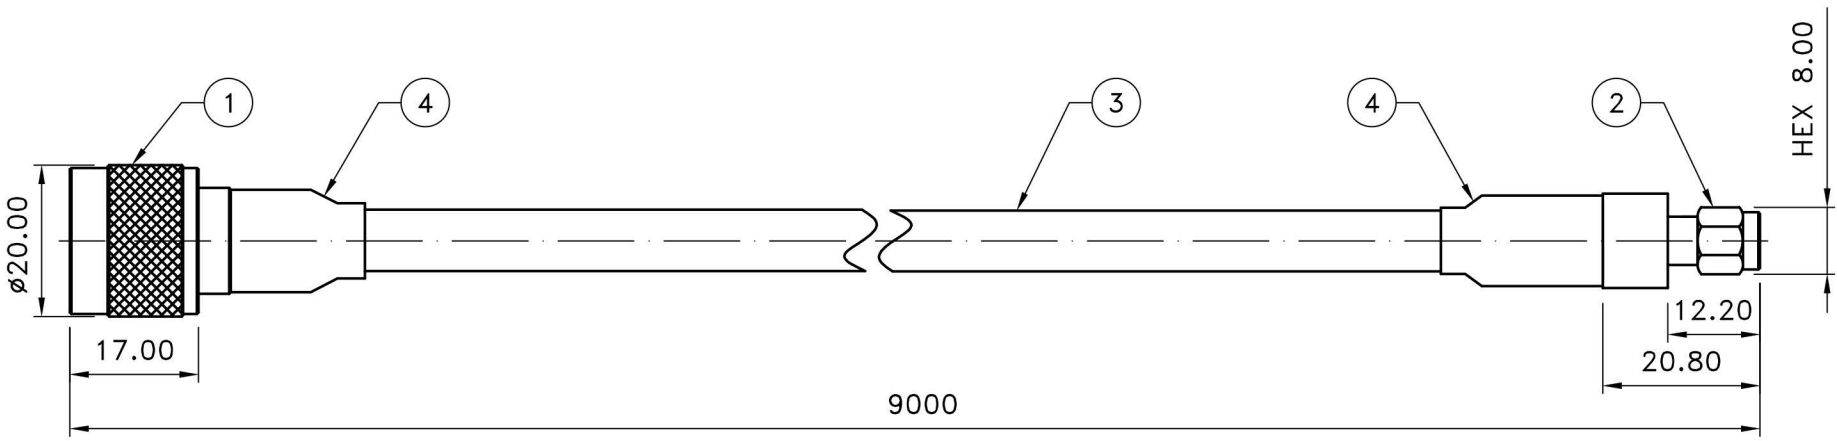

NOTE:  
 1.N MALE CRIMP  
 CENTER PIN GOLD PLATING 3μ THICK OVER NICKEL STRIKE  
 BODY NICKEL PLATING 70μ THICK OVER NICKEL STRIKE  
 BRASS AND PTFE PER SGS  
 FINISH PLATING THICKNESS IN MICRO-INCHES  
 COPPER PARTS AUTOMATIC CNC MANUFACTURING  
 2.RP SMA MALE CRIMP  
 CENTER PIN GOLD PLATING 3μ THICK OVER NICKEL STRIKE  
 BODY NICKEL PLATING 70μ THICK OVER NICKEL STRIKE  
 BRASS AND PTFE PER SGS  
 PTFE : TOMBO No.9002  
 FINISH PLATING THICKNESS IN MICRO-INCHES  
 COPPER PARTS AUTOMATIC CNC MANUFACTURING  
 3.LOW LOSS 400 COAXIAL CABLE/8D  
 ATTENUATION : 0.061dB/ft@1575MHz 0.086dB/ft@3000MHz 0.125dB/ft@6000MHz  
 CONDUCTOR : COPPER CLAD ALUMINIUM/Ø2.74mm  
 INSULATION : GAS-FPE/Ø7.24mm  
 TAPE : BONDED ALUMINUM FOIL  
 SHIELD : TINNED COPPER WARE/16\*6\*0.12mm/67% COVERAGE  
 JACKET : PE/Ø10.29mm

Prohibit re-circulating

**RoHS**  
COMPLIANT

**WIFI-Link™**  
台灣威海尼可

NO	DESCRIPTION	MATERIAL	FINISH	Q'ty
4	D0087 (SHRINK TUBE)	PE	BLACK	2
3	LLC400	ASSY	BLACK	1
2	SMA-1001-13-B4-TGN	BRASS	NICKEL	1
1	N-1101-9-B4-TGN	BRASS	NICKEL	1

NOTE	DIMENSION
1.STRIP ALL BURRS. 2.ALL DIMENSIONS ARE AFTER PLATING. 3.DIAMETERS ON COMMON CENTERS. TO BE CONCENTRIC WITHIN 0.1 T.I.R 4.CHAMFER 1ST & LAST THREADS 45° 5.BREAK ALL CONNERS & EDGES CO.15 MAX.	UNLESS OTHERWISE NOTED TOLERANCES 0.X=±0.2 0.XX=±0.1 CABLE LENGTH: L ≥10000=+ <sup>50</sup> <sub>-0</sub> 1000≤L<10000=+ <sup>30</sup> <sub>-0</sub> L<1000=+ <sup>8</sup> <sub>-0</sub>

TITLE	
N male to RP SMA male	
DRAWING NO.	
np-rsmap-400-9.0	
APPROVED	DRAWN DATE
	03/01/18
CHECKED	SCALE
	1:1
DRAWN	UNIT
ALICE	mm