REV	DATE	DESCRIPTION	DRAWN

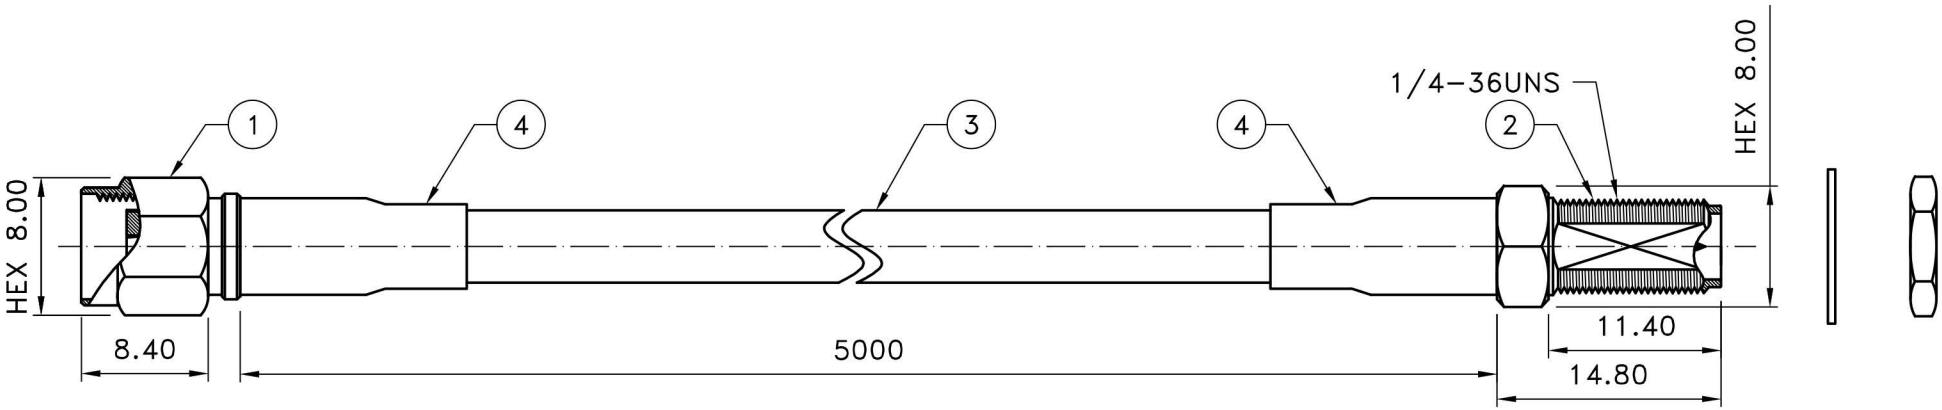



RECOMMENDED MOUNTING HOLE

NOTE:
1.RP SMA MALE CRIMP
CENTER PIN GOLD PLATING 20μ THICK OVER NICKEL STRIKE
BODY GOLD PLATING 3μ THICK OVER NICKEL STRIKE
BRASS AND PTFE PER SGS
PTFE : TOMBO No.9002
FINISH PLATING THICKNESS IN MICRO-INCHES
COPPER PARTS AUTOMATIC CNC MANUFACTURING
2.RP SMA FEMALE BULKHEAD CRIMP
CENTER PIN GOLD PLATING 20μ THICK OVER NICKEL STRIKE
BODY GOLD PLATING 3μ THICK OVER NICKEL STRIKE
BRASS AND PTFE PER SGS
PTFE : TOMBO No.9002
FINISH PLATING THICKNESS IN MICRO-INCHES
COPPER PARTS AUTOMATIC CNC MANUFACTURING
3.LOW LOSS 200A COAXIAL CABLE/3D
ATTENUATION : 0.32dB/m@900MHZ 0.42dB/m@1800MHZ 0.61dB/m@3000MHZ
CONDUCTOR : BARE COPPER WIRE/Ø1.12mm
INSULATION : GAS-FPE/Ø2.95mm
TAPE : BONDED ALUMINUM FOIL
SHIELD : TINNED COPPER WARE/16*4*0.10mm/59% COVERAGE
JACKET : PVC/Ø4.95mm

NO	DESCRIPTION	MATERIAL	FINISH	Q'ty
4	D0176 (SHRINK TUBE)	PE	BLACK	2
3	LLC200	ASSY	BLACK	1
2	WL-SMA-2-BJRP200	BRASS	GOLD	1
1	WL-SMA-1-RP200	BRASS	GOLD	1

Prohibit re-circulating

RoHS COMPLIANT

NOTE	DIMENSION
1.STRIP ALL BURRS. 2.ALL DIMENSIONS ARE AFTER PLATING. 3.DIAMETERS ON COMMON CENTERS. TO BE CONCENTRIC WITHIN 0.1 T.I.R 4.CHAMFER 1ST & LAST THREADS 45°. 5.BREAK ALL CONNERS & EDGES CO.15 MAX.	UNLESS OTHERWISE NOTED TOLERANCES 0.X=±0.2 0.XX=±0.1 CABLE LENGTH: L≥10000=$^{+50}_{-0}$ 1000≤L<10000=$^{+30}_{-0}$ L<1000=$^{+8}_{-0}$

WIFI-Link™ 台灣崴海尼可

TITLE	RP SMA MALE-RP SMA FEMALE
DRAWING NO.	RSMAP-RSMAJB-200-5.0
APPROVED	DRAWN DATE 06/22/17
CHECKED	SCALE 2:1
DRAWN ALICE	UNIT mm