


REV	DATE	DESCRIPTION	DRAWN

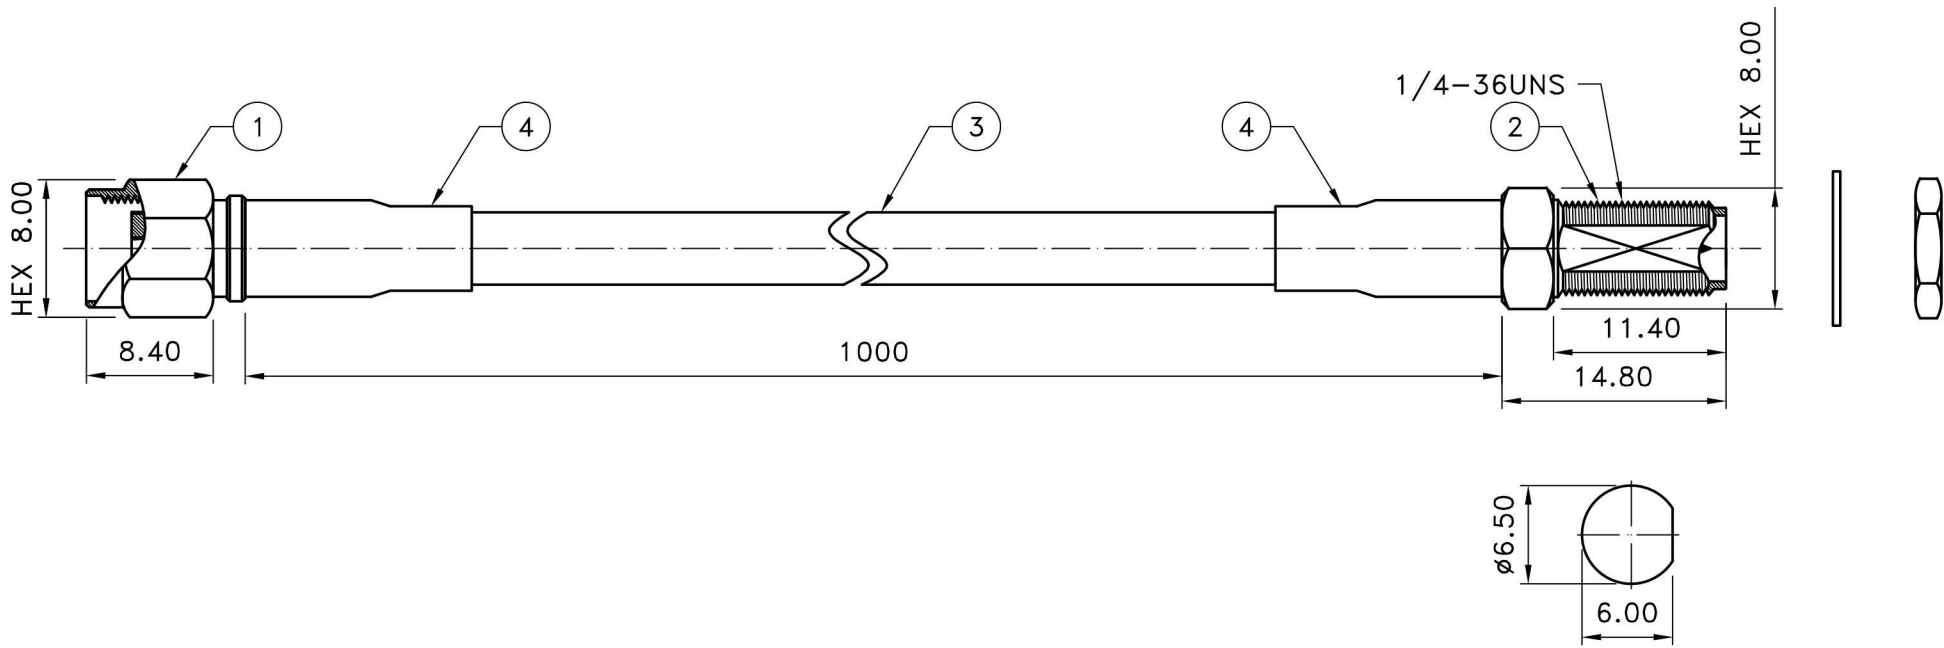

RECOMMENDED MOUNTING HOLE

NOTE:

- 1.RP SMA MALE CRIMP
CENTER PIN GOLD PLATING 20μ THICK OVER NICKEL STRIKE
BODY GOLD PLATING 3μ THICK OVER NICKEL STRIKE
BRASS AND PTFE PER SGS
PTFE : TOMBO No.9002
FINISH PLATING THICKNESS IN MICRO-INCHES
COPPER PARTS AUTOMATIC CNC MANUFACTURING
- 2.RP SMA FEMALE BULKHEAD CRIMP
CENTER PIN GOLD PLATING 20μ THICK OVER NICKEL STRIKE
BODY GOLD PLATING 3μ THICK OVER NICKEL STRIKE
BRASS AND PTFE PER SGS
PTFE : TOMBO No.9002
FINISH PLATING THICKNESS IN MICRO-INCHES
COPPER PARTS AUTOMATIC CNC MANUFACTURING
- 3.LOW LOSS 200A COAXIAL CABLE/3D
ATTENUATION : 0.32dB/m@900MHZ 0.42dB/m@1800MHZ 0.61dB/m@3000MHZ
CONDUCTOR : BARE COPPER WIRE/Ø1.12mm
INSULATION : GAS-FPE/Ø2.95mm
TAPE : BONDED ALUMINUM FOIL
SHIELD : TINNED COPPER WARE/16*4*0.10mm/59% COVERAGE
JACKET : PVC/Ø4.95mm

Prohibit re-circulating



NO	DESCRIPTION	MATERIAL	FINISH	Q'ty
4	D0176 (SHRINK TUBE)	PE	BLACK	2
3	LLC200	ASSY	BLACK	1
2	WL-SMA-2-BJRP200	BRASS	GOLD	1
1	WL-SMA-1-RP200	BRASS	GOLD	1

NOTE	DIMENSION
1.STRIP ALL BURRS. 2.ALL DIMENSIONS ARE AFTER PLATING. 3.DIAMETERS ON COMMON CENTERS. TO BE CONCENTRIC WITHIN 0.1 T.I.R 4.CHAMFER 1ST & LAST THREADS 45° 5.BREAK ALL CONNERS & EDGES CO.15 MAX.	UNLESS OTHERWISE NOTED TOLERANCES 0.X=±0.2 0.XX=±0.1 CABLE LENGTH: L ≥10000=+ ⁵⁰ ₀ 1000≤L<10000=+ ³⁰ ₋₀ L<1000=+ ⁸ ₋₀

TITLE RP SMA MALE-RP SMA FEMALE	
DRAWING NO. RSMAP-RSMAJB-200-1.0	
APPROVED	DRAWN DATE 06/22/17
CHECKED	SCALE 2:1
DRAWN ALICE	UNIT mm