


REV	DATE	DESCRIPTION	DRAWN



NOTE:
1.N FEMALE BULKHEAD
CENTER PIN GOLD PLATING 3μ THICK OVER NICKEL STRIKE
BODY NICKEL PLATING 70μ THICK OVER NICKEL STRIKE
BRASS AND PTFE PER SGS
FINISH PLATING THICKNESS IN MICRO-INCHES
COPPER PARTS AUTOMATIC CNC MANUFACTURING
2.RP SMA MALE
CENTER PIN GOLD PLATING 20μ THICK OVER NICKEL STRIKE
BODY GOLD PLATING 3μ THICK OVER NICKEL STRIKE
BRASS AND PTFE PER SGS
PTFE : TOMBO No.9002
FINISH PLATING THICKNESS IN MICRO-INCHES
COPPER PARTS AUTOMATIC CNC MANUFACTURING
3.LOW LOSS 100 COAXIAL CABLE
ATTENUATION : 0.75dB/m@900MHz 1.09dB/m@1800MHz 1.31dB/m@2500MHz
CONDUCTOR : COPPER COATED STEEL WIRE/Ø0.46mm
INSULATION : SOLID PE/Ø1.52mm
TAPE : BONDED ALUMINUM FOIL
SHIELD : TINNED COPPER WARE/16*5*0.10mm/95% COVERAGE
JACKET : PVC/Ø2.79mm

Prohibit re-circulating

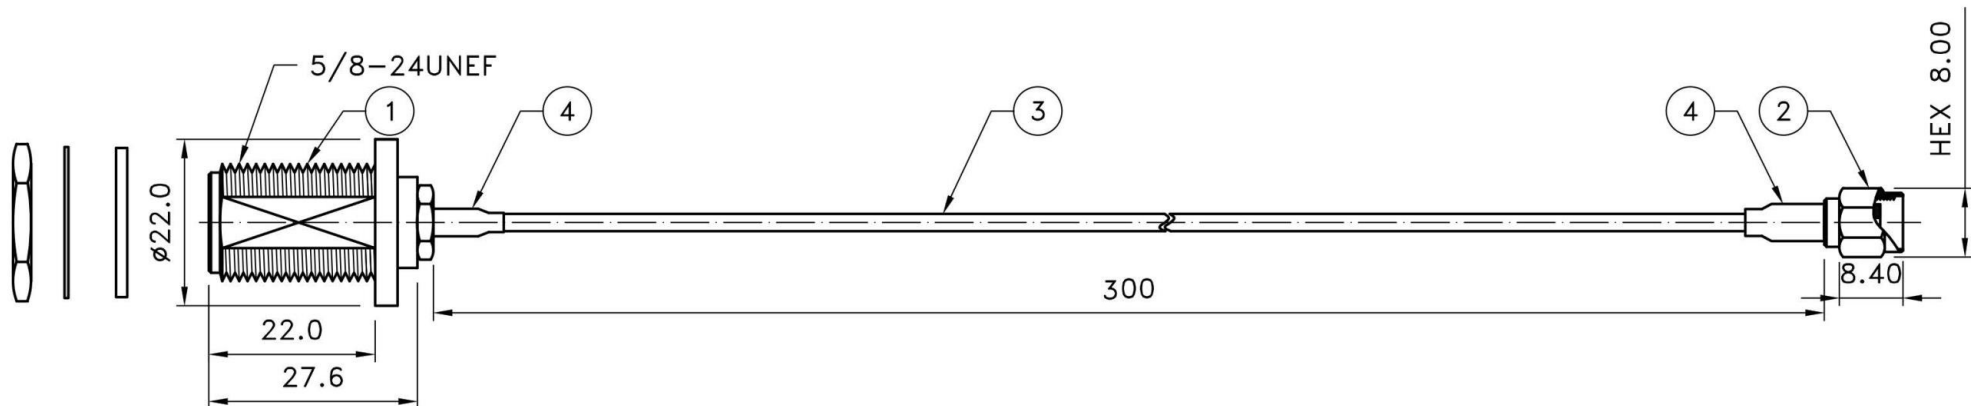

4	D0269 (SHRINK TUBE)	PE	BLACK	2
3	LLC100	ASSY	BLACK	1
2	SMA-1001-3-L-RP-TGG	BRASS	GOLD	1
1	N-1159-1-L-TGN	BRASS	NICKEL	1
NO	DESCRIPTION	MATERIAL	FINISH	Q'ty

NOTE	DIMENSION
1.STRIP ALL BURRS. 2.ALL DIMENSIONS ARE AFTER PLATING. 3.DIAMETERS ON COMMON CENTERS. TO BE CONCENTRIC WITHIN 0.1 T.I.R 4.CHAMFER 1ST & LAST THREADS 45° 5.BREAK ALL CONNERS & EDGES CO.15 MAX.	UNLESS OTHERWISE NOTED TOLERANCES 0.X=±0.2 0.XX=±0.1 CABLE LENGTH: L ≥10000=+ ⁵⁰ ₀ 1000≤L<10000=+ ³⁰ ₀ L<1000=+ ⁸ ₀

 WIFI-Link™ 台灣崑海尼可	
TITLE RSMAM-NBJ	
DRAWING NO. rsmap-nbj-100-0.30	
APPROVED	DRAWN DATE 04/29/13
CHECKED	SCALE 1:1
DRAWN ALICE	UNIT mm