


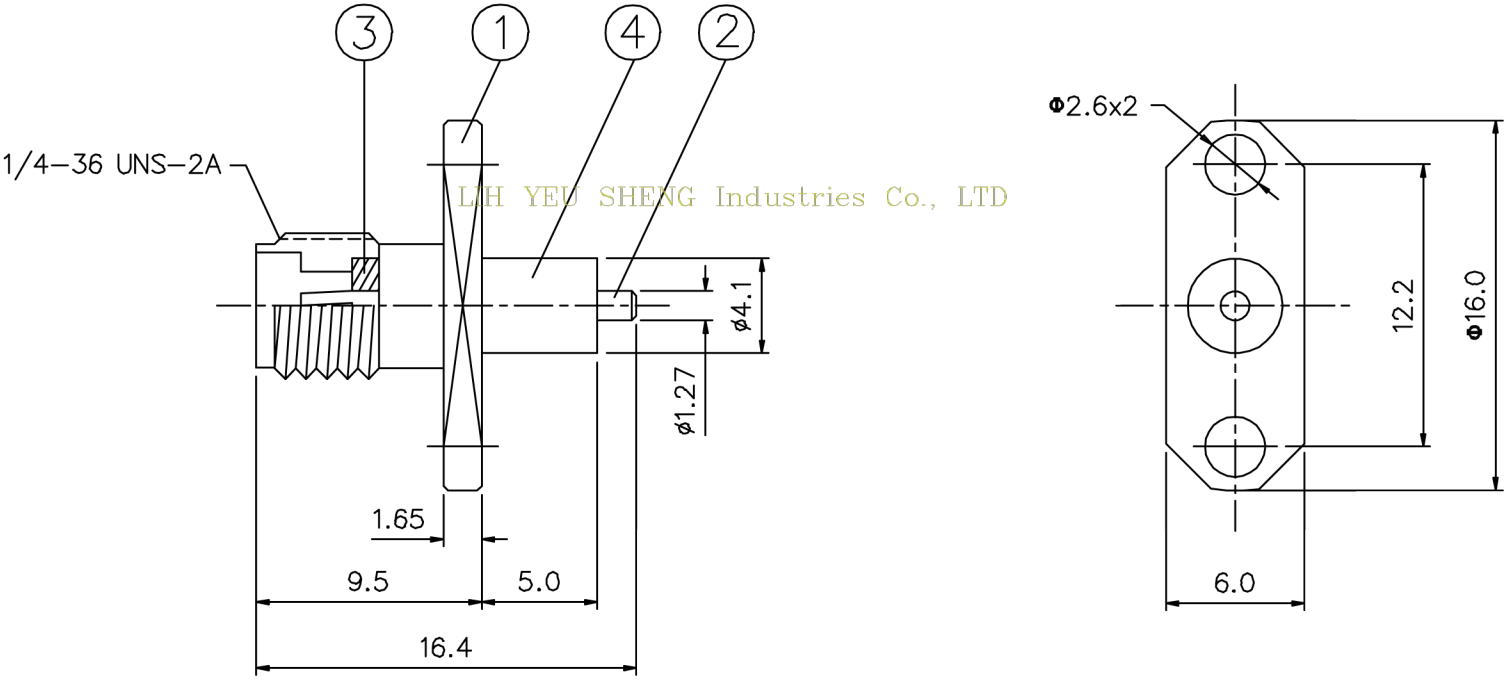

ELECTRICAL PERFORMANCE :

IMPEDANCE : 50 OHMS

FREQUENCY : DC-18.0GHz

WORKING VOLTAGE : 500Vrms MAX.

DIELECTRIC WITHSTANDING VOLTAGE : 1000Vrms MAX.

INSULATOR RESISTANCE : 5000 MEGOHMS MIN.

NO.	DESCRIPTION	MATERIALS	FINISHED
1	BODY	BRASS	Gold 10 μ"
2	CONTACT	Be. Copper	Gold 30 μ"
3	INSULATOR	TEFLON	
4	INSULATOR	TEFLON	

RoHS COMPLIANCE	Unit : mm	Scale : NTS
TOLERANCE : X=±0.2 X.X=±0.1 X.XX=±0.05		
TITLE : SMA Female Panel 2 Holes Exposed Teflon Blunt Post		



WIFI-Link™
台灣 威海尼可

PART NO.

WL-SMA-3-CM2H