


REV	DATE	DESCRIPTION	DRAWN

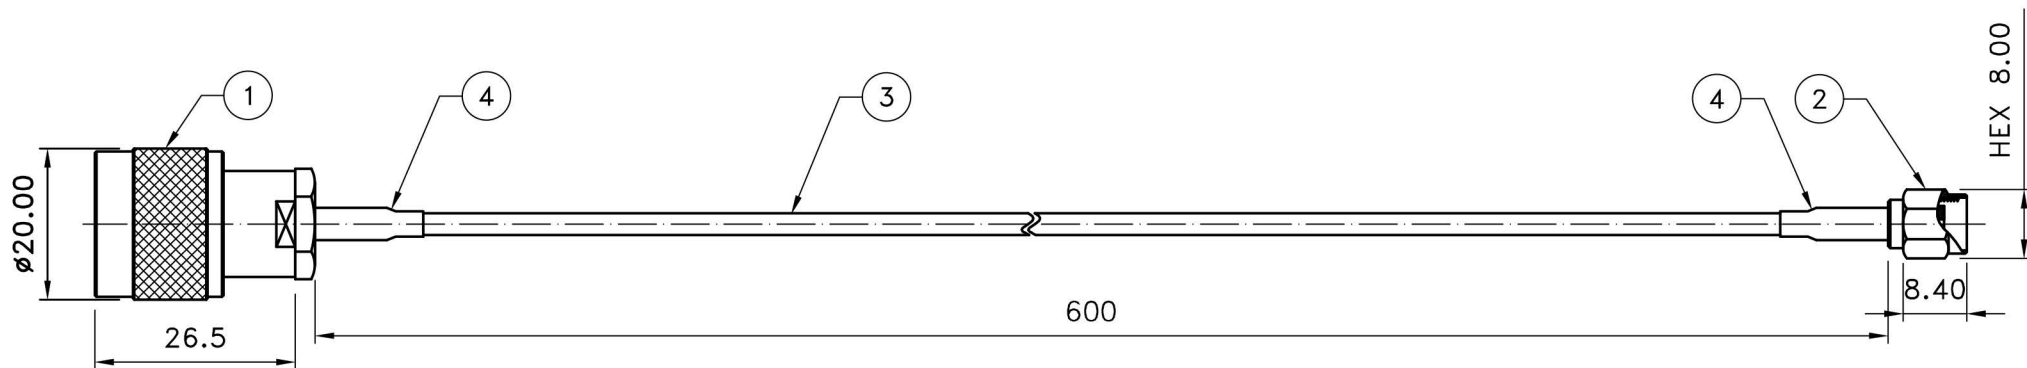

NOTE:

1.N MALE

CENTER PIN GOLD PLATING 3μ THICK OVER NICKEL STRIKE
 BODY NICKEL PLATING 70μ THICK OVER NICKEL STRIKE
 BRASS AND PTFE PER SGS
 FINISH PLATING THICKNESS IN MICRO-INCHES
 COPPER PARTS AUTOMATIC CNC MANUFACTURING

2.RP SMA MALE

CENTER PIN GOLD PLATING 20μ THICK OVER NICKEL STRIKE
 BODY GOLD PLATING 3μ THICK OVER NICKEL STRIKE
 BRASS AND PTFE PER SGS
 PTFE : TOMBO No.9002
 FINISH PLATING THICKNESS IN MICRO-INCHES
 COPPER PARTS AUTOMATIC CNC MANUFACTURING

3.LOW LOSS 100 COAXIAL CABLE

ATTENUATION : 0.75dB/m@900MHz 1.09dB/m@1800MHz 1.31dB/m@2500MHz
 CONDUCTOR : COPPER COATED STEEL WIRE/Ø0.46mm
 INSULATION : SOLID PE/Ø1.52mm
 TAPE : BONDED ALUMINUM FOIL
 SHIELD : TINNED COPPER WARE/16*5*0.10mm/95% COVERAGE
 JACKET : PVC/Ø2.79mm

Prohibit re-circulating



TITLE N MALE-RP SMA MALE	
DRAWING NO. NP-RSMAP-100-0.60	
APPROVED	DRAWN DATE 02/25/13
CHECKED	SCALE 1:1
DRAWN ALICE	UNIT mm

NOTE	DIMENSION
1.STRIP ALL BURRS. 2.ALL DIMENSIONS ARE AFTER PLATING. 3.DIAMETERS ON COMMON CENTERS. TO BE CONCENTRIC WITHIN 0.1 T.I.R 4.CHAMFER 1ST & LAST THREADS 45° 5.BREAK ALL CONNERS & EDGES CO.15 MAX.	UNLESS OTHERWISE NOTED TOLERANCES 0.X=±0.2 0.XX=±0.1 CABLE LENGTH: L ≥10000=+50 1000≤L<10000=+30 L<1000=+8

NO	DESCRIPTION	MATERIAL	FINISH	Q'ty
4	D0269 (SHRINK TUBE)	PE	BLACK	2
3	LLC100	ASSY	BLACK	1
2	WL-SMA-1-RP400	BRASS	GOLD	1
1	WL-N-1-100	BRASS	NICKEL	1

All creative content and details belonging to HYT's confidential, and the owner, without consent, Do not posted, theft, copied and sent to a third party.