


REV	DATE	DESCRIPTION	DRAWN

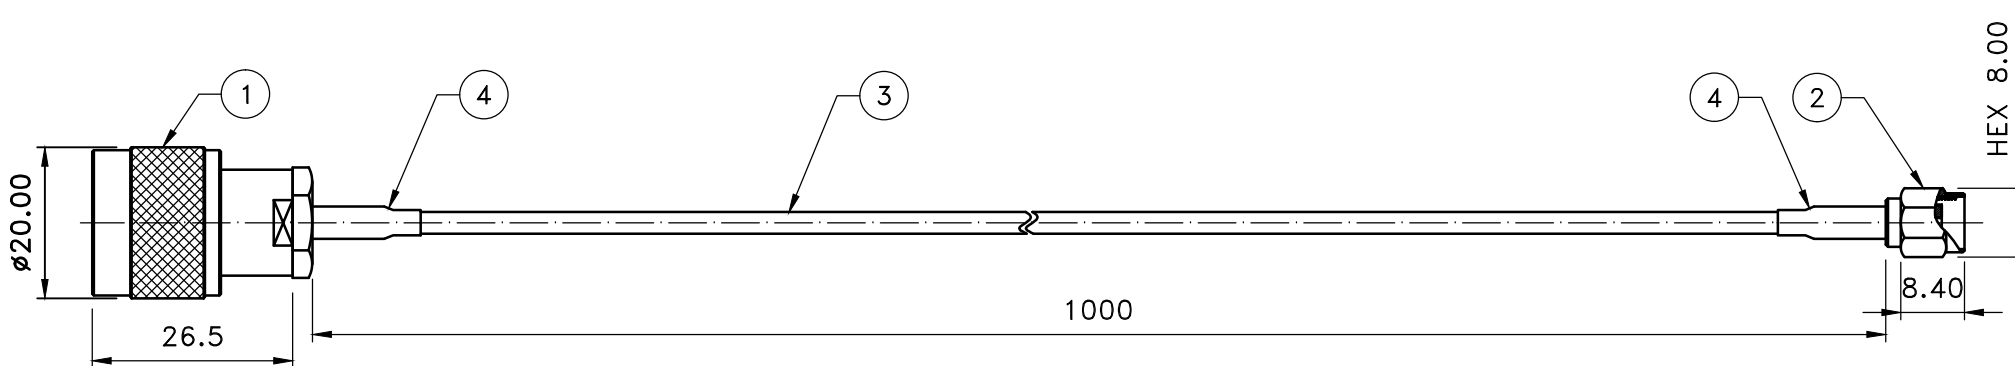

NOTE:

- 1.N MALE
 CENTER PIN GOLD PLATING 3 μ THICK OVER NICKEL STRIKE
 BODY NICKEL PLATING 70 μ THICK OVER NICKEL STRIKE
 BRASS AND PTFE PER SGS
 FINISH PLATING THICKNESS IN MICRO-INCHES
 COPPER PARTS AUTOMATIC CNC MANUFACTURING
- 2.RP SMA MALE
 CENTER PIN GOLD PLATING 20 μ THICK OVER NICKEL STRIKE
 BODY GOLD PLATING 3 μ THICK OVER NICKEL STRIKE
 BRASS AND PTFE PER SGS
 PTFE : TOMBO No.9002
 FINISH PLATING THICKNESS IN MICRO-INCHES
 COPPER PARTS AUTOMATIC CNC MANUFACTURING
- 3.LOW LOSS 100 COAXIAL CABLE
 ATTENUATION : 0.75dB/m@900MHz 1.09dB/m@1800MHz 1.31dB/m@2500MHz
 CONDUCTOR : COPPER COATED STEEL WIRE/Ø0.46mm
 INSULATION : SOLID PE/Ø1.52mm
 TAPE : BONDED ALUMINUM FOIL
 SHIELD : TINNED COPPER WARE/16*5*0.10mm/95% COVERAGE
 JACKET : PVC/Ø2.79mm

Prohibit re-circulating



4	D0269 (SHRINK TUBE)	PE	BLACK	2
3	LLC100	ASSY	BLACK	1
2	WL-SMA-1-RP400	BRASS	GOLD	1
1	WL-N-1-100	BRASS	NICKEL	1
NO	DESCRIPTION	MATERIAL	FINISH	Q'ty

NOTE		DIMENSION	
1.STRIP ALL BURRS. 2.ALL DIMENSIONS ARE AFTER PLATING. 3.DIAMETERS ON COMMON CENTERS. TO BE CONCENTRIC WITHIN 0.1 T.I.R 4.CHAMFER 1ST & LAST THREADS 45° 5.BREAK ALL CONNERS & EDGES CO.15 MAX.		UNLESS OTHERWISE NOTED TOLERANCES	
		0.X=±0.2	
		0.XX=±0.1	
		CABLE LENGTH: L ≥ 10000 = +50	
		1000 ≤ L < 10000 = +30	
		L < 1000 = +8	
DRAWING NO. NP-RSMAP-100-1.0		APPROVED	DRAWN DATE 02/25/13
CHECKED		SCALE 1:1	
DRAWN ALICE		UNIT mm	

All creative content and details belonging to HYT's confidential, and the owner, without consent, Do not posted, theft, copied and sent to a third party.