



WDS AP跟WDS Clinet無線中繼設定

設備預設 IP 登入位置：192.168.1.1 預設密碼:admin

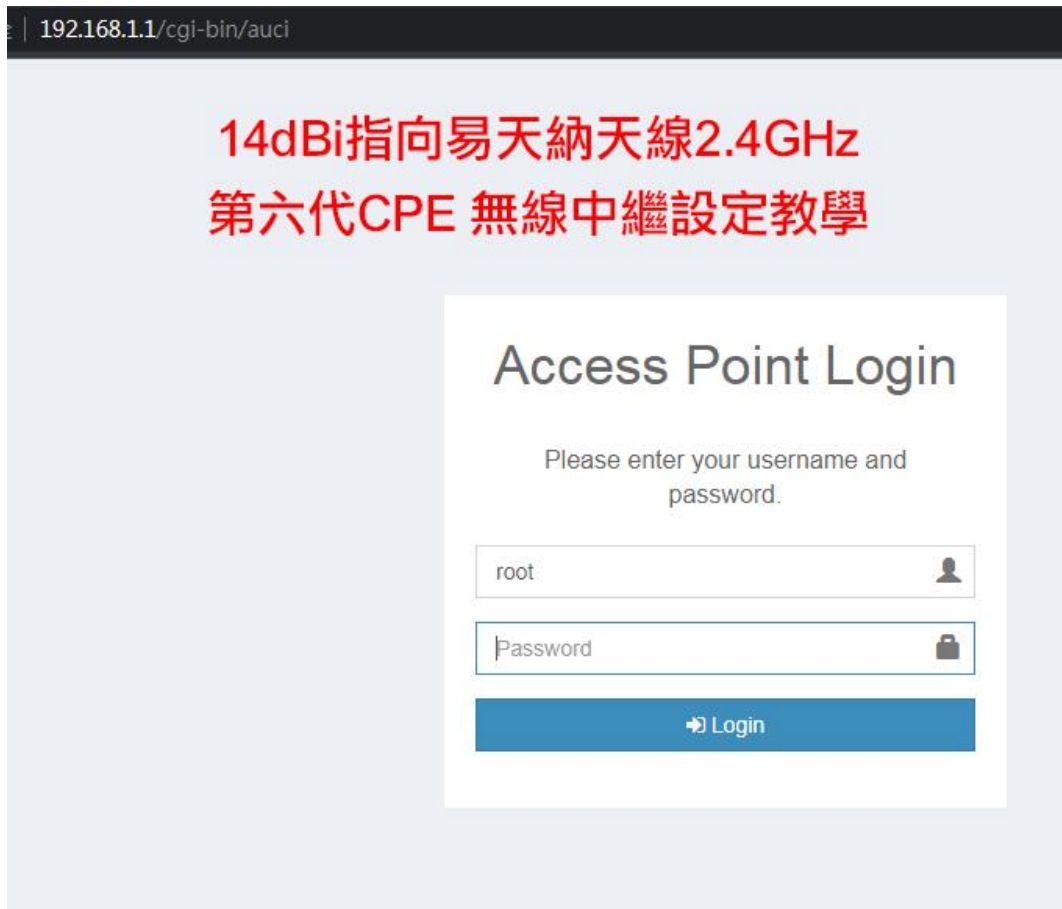

WDS AP(發送端)

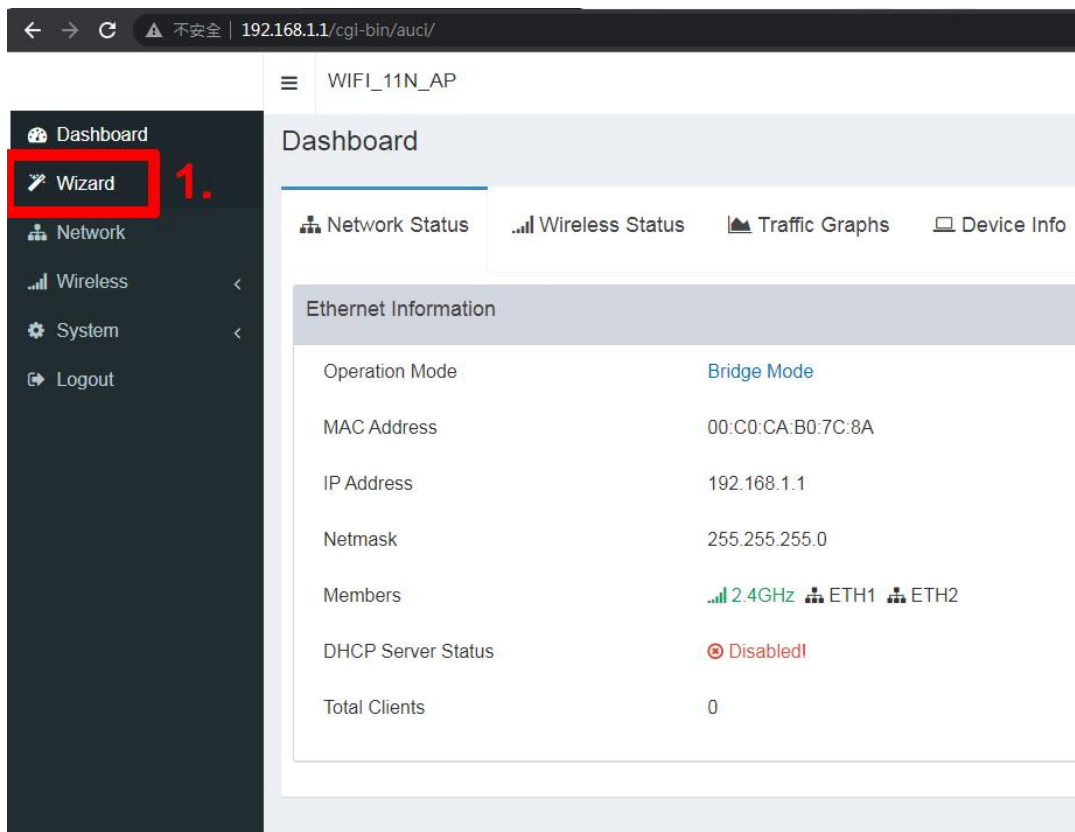

Wizard Settings

Device setting

Country Code: US - United States

Operation Mode: **WDS Mode** **2.**

LAN Settings

IP Address: 192.168.1.1

Subnet Mask: 255.255.255.0

Gateway:

DNS:

Next

Wizard Settings

Device setting

Country Code: US - United States

Operation Mode: WDS Mode

WDS Mode: **WDS AP Mode** **3.**

LAN Settings

IP Address: 192.168.1.1

Subnet Mask: 255.255.255.0

Gateway:

DNS:

Next **4.**

Wizard Settings

2.4GHz (Radio 0)

Radio	Enable	5.
AP SSID	test	更改SSID
Security Settings	WPA/WPA2 PSK MIXED	選擇加密模式
Cipher	AES(CCMP)	
WPA Passphrase	設定密碼

← Back **→ Save** 6.

WDS Client(接收端)

Dashboard

Wizard 1.

Network

Wireless <

System <

Logout

Wizard Settings

Device setting

Country Code	US - United States
Operation Mode	AP Bridge Mode WDS Mode 2. AP Bridge Mode Client Bridge Mode

LAN Settings

IP Address	192.168.1.1
Subnet Mask	255.255.255.0
Gateway	
DNS	

→ Next

- Dashboard
- Wizard
- Network
- Wireless <
- System <
- Logout

Wizard Settings

Device setting

Country Code	US - United States
Operation Mode	WDS Mode
WDS Mode	WDS AP Mode
	WDS Client Mode 3.
	WDS Bridge Mode

LAN Settings

IP Address	192.168.1.1
Subnet Mask	255.255.255.0
Gateway	
DNS	

[Next](#)

- Dashboard
- Wizard
- Network
- Wireless <
- System <
- Logout

Wizard Settings

Device setting

Country Code	US - United States
Operation Mode	WDS Mode
WDS Mode	WDS Client Mode

LAN Settings

IP Address	192.168.1.2	4.更改ip
Subnet Mask	255.255.255.0	
Gateway		
DNS		

[Next](#) 5.

Wireless Scan

Show ALL entries

Search:

6. 選擇串聯的SSID

Quality	Channel	SSID	MAC Address	Security	Join Network
-25dB	5	test	00:C0:CA:B0:7C:8C	mixed WPA/WPA2 PSK (CCMP)	Join Network
-31dB	11	WIFI-LINK	50:64:2B:E9:C8:FA	mixed WPA/WPA2 PSK (TKIP)	Join Network
	4	8888	FC:FE:28:74:D4:4C	WPA2 PSK (CCMP)	Join Network

FI_11N_AP

rd S

reles

ALL

ty

Add Wireless Profile

Radio: ALL Radio

AP SSID: test

Security Settings: WPA/WPA2 PSK MIXED

Cipher: AES/TKIP Mixed

WPA Passphrase:

7. 輸入密碼

8.

Close Apply

6 TP-LINK_5DC452 E8-DE-27-5D-C4-52 WPA2 PSK (TKIP

完成

← → ↻ ⚠ 不安全 | 192.168.1.1/cgi-bin/auci/admin/dashboard

☰ WIFI_11N_AP

Dashboard

🏠 Network Status 📶 Wireless Status 📊 Traffic Graphs

📶 Wireless Radio 0 (2.4GHz)

Radio Status	Enabled
IEEE Mode	802.11bgn
Channel	5 (2.432 GHz) @ HT40
Tx-Power	23 dBm (US)
Bitrate	144 Mbit/s

SSID	STATUS	MAC ADDRESS	SECURITY
test	Enabled	00:C0:CA:B0:7C:8C	WPA/WPA2 PSK MIXED

📶 Associated Clients

Access Point	MAC ADDRESS	SIGNAL
test	D4:3D:7E:18:4C:30	-24
test	00:C0:CA:B0:7C:89	-24

← → ↻ ⚠ 不安全 | 192.168.1.2/cgi-bin/auci/

☰ WIFI_11N_AP

Dashboard

🏠 Network Status 📶 Wireless Status 📊 Traffic Graphs

📶 Wireless Radio 0 (2.4GHz)

Radio Status	Enabled
IEEE Mode	802.11bgn
Channel	5 (2.432 GHz) @ HT40
Tx-Power	23 dBm (US)
Bitrate	144 Mbit/s

SSID	STATUS	MAC ADDRESS	SECURITY
test	Enabled	00:C0:CA:B0:7C:8C	-

📶 Associated Clients

Access Point	MAC ADDRESS	SIGNAL
test	00:C0:CA:B0:7C:8C	-28