


WL-GPA-1000U

802.3at/af Gigabit PoE Adapter

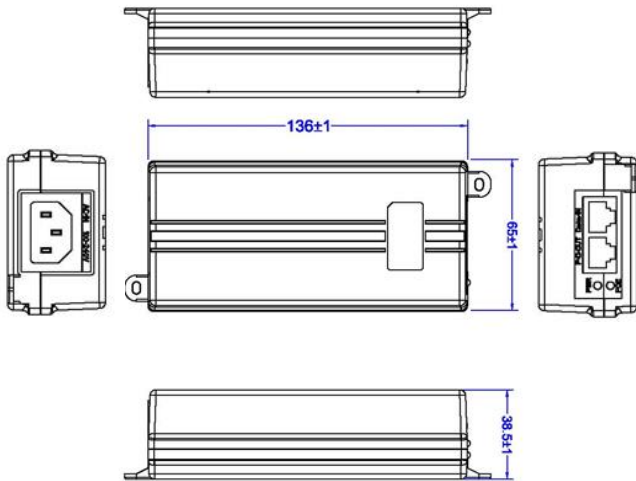

Features

- Gigabit Ethernet Speeds
- Up to 30W power
- Desktop, shelf and friendly wall mounting
- User for access point, VoIP and IP camera



Specifications

Standards	IEEE802.3 10Base-T, IEEE802.3u 100Base-TX, IEEE802.3ab 1000Base-T IEEE802.3af, IEEE802.3at		
Ethernet data rate	10/100/1000Mbps	Dimensions	136 x 65 x 38.5mm
LED	Power LED / PoE LED	Weight	168g
Pin Assignment and Polarity	1/2 (+), 3/6(-)	Reliability	MTBF: 50,000hrs.@25°C
Input Power	Voltage: 90 to 264Vac Current: 750mA Frequency: 47Hz~63Hz	Temperature	Operation: -10°C ~40°C Storage: -20°C~85°C
Output Power	48Vdc 600mA 30Watt	Humidity	Operation: 5~90% Storage: 5~90%
Certificated	UL/CUL, CB, GS/LVD, FCC, CE		



WIFI-Link™ Technologies Inc.

歲海尼可網路科技有限公司

WEB: <http://www.wifi-link.com.tw/> TEL: 06-2523801 FAX: 06-2526033