

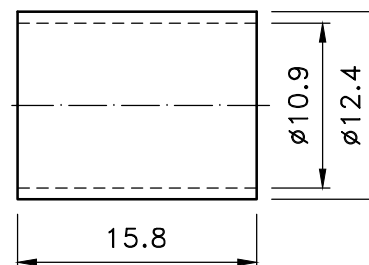


REV	DATE	DESCRIPTION	DRAWN
04/09/09	已校正		
△			

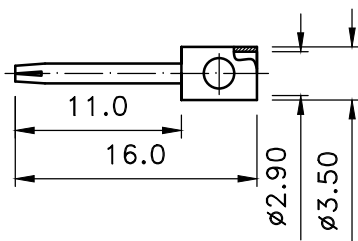

NOTE:
 CENTER PIN GOLD PLATING 20 μ THICK OVER NICKEL STRIKE
 BODY NICKEL PLATING 80 μ THICK OVER NICKEL STRIKE
 BRASS AND PTFE PER SGS
 PTFE : TOMBO No.9002
 FINISH PLATING THICKNESS IN MICRO-INCHES
 COPPER PARTS AUTOMATIC CNC MANUFACTURING

7	C-RING	BE BRONZE	NONE	1
6	SHELL	BRASS	NICKEL	1
5	GASKET	SILICONE	NONE	1
4	INSULATOR	PTFE	NONE	1
3	FERRULE	BRASS	NICKEL	1
2	PIN	BE BRONZE	GOLD	1
1	BODY	BRASS	NICKEL	1
NO	DESCRIPTION	MATERIAL	FINISH	QTY

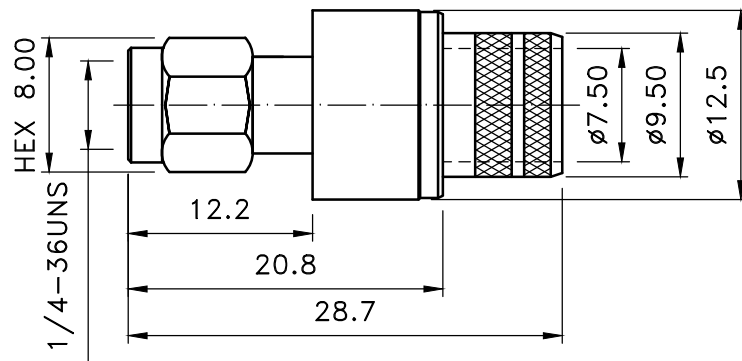

NOTE	DIMENSION
1. STRIP ALL BURRS. 2. ALL DIMENSIONS ARE AFTER PLATING. 3. DIAMETERS ON COMMON CENTERS. 4. CHAMFER 1ST & LAST THREADS 45°. 5. BREAK ALL CONNERS & EDGES CO.15 MAX.	UNLESS OTHERWISE NOTED TOLERANCES X=±0.3 0.X=±0.2 0.XX=±0.1

Prohibit re-circulating

			WIFI-Link™ 台灣威海尼可		
TITLE RP SMA MALE CRIMP					
DRAWING NO. WL-SMA-1-RP400					
APPROVED			DRAWN DATE 04/09/09		
CHECKED			SCALE 2:1		
DRAWN ALICE			UNIT mm		LY

All creative content and details belonging to HYT's confidential, and the owner, without consent, Do not posted, theft, copied and sent to a third party.