



REV	DATE	DESCRIPTION	DRAWN
	08/10/20	已改	AGASSI

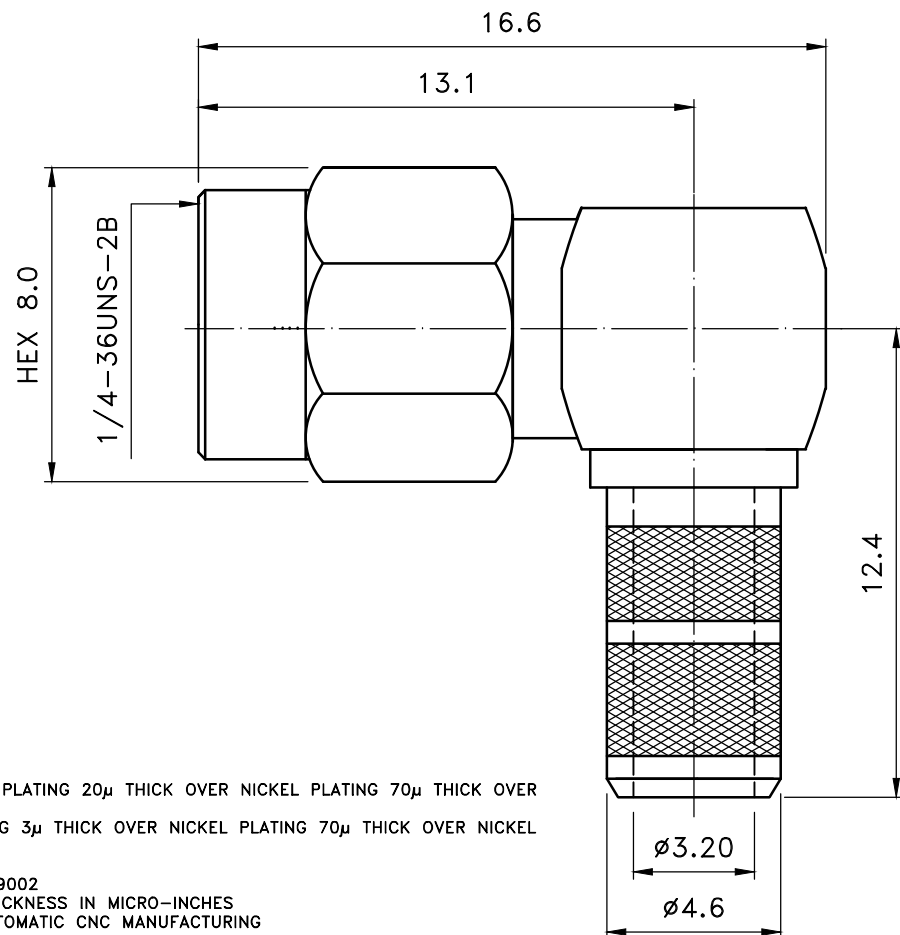

NOTE:

- CENTER PIN GOLD PLATING 20 μ THICK OVER NICKEL PLATING 70 μ THICK OVER NICKEL STRIKE
- BODY GOLD PLATING 3 μ THICK OVER NICKEL PLATING 70 μ THICK OVER NICKEL STRIKE
- BRASS PER SGS
- PTFE : TOMBO No.9002
- FINISH PLATING THICKNESS IN MICRO-INCHES
- COPPER PARTS AUTOMATIC CNC MANUFACTURING
- ROHS COMPLIANT

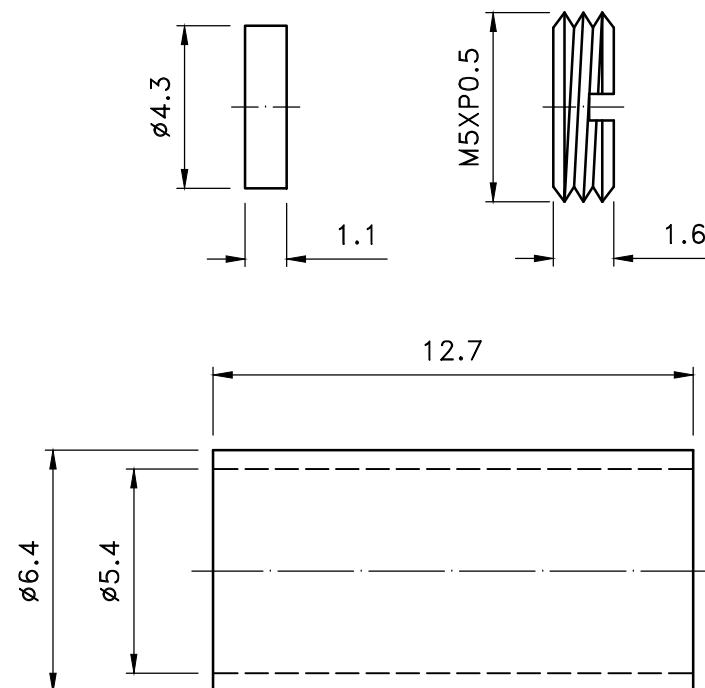

Prohibit re-circulating

8	GASKET	SI-RUBBER	NONE	1
7	RETAINING RING	BE BRONZE	NONE	1
6	FERRULE	COPPER	GOLD	1
5	PRESS FIT FERRULE STUD	BRASS	GOLD	1
4	DIELECTRIC COVER	TEFLON	NONE	1
3	DIELECTRIC	TEFLON	NONE	1
2	PIN	BRASS	GOLD	1
1	BODY	BRASS	GOLD	1
NO	DESCRIPTION	MATERIAL	FINISH	Q'ty



NOTE	DIMENSION
1. STRIP ALL BURRS.	UNLESS OTHERWISE NOTED TOLERANCES
2. ALL DIMENSIONS ARE AFTER PLATING.	X=±0.2
3. DIAMETERS ON COMMON CENTERS.	0.X=±0.1
4. CHAMFER 1ST & LAST THREADS 45°.	0.XX=±0.05
5. BREAK ALL CONNERS & EDGES C0.15 MAX.	

TITLE RIGHT ANGLE SMA MALE CRIMP TYPE		
DRAWING NO. WL-SMA-1-RA200		
APPROVED	DRAWN DATE 08/12/04	
CHECKED	SCALE 5:1	
DRAWN AGASSI	UNIT mm	LY